


WIRELESS PUSH BUTTON OPERATION INSTRUCTION

! Please refer to the following before using.


1. PRODUCT OVERVIEW

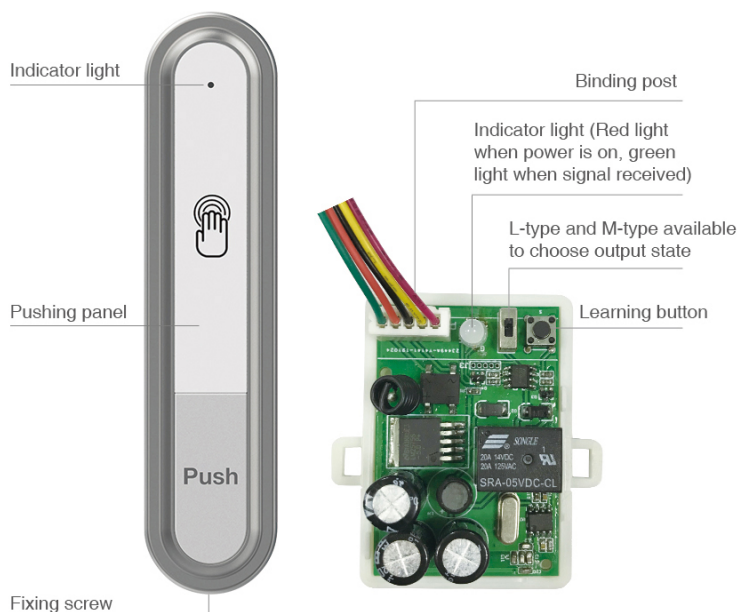

2. PRODUCT FEATURE

- ① Uniformity frequency to make sure the high stability of signal transmitting and receiving.
- ② Push button with low power consumption, long durability.
- ③ Three-point trigger pressing design to ensure the effective action .
- ④ Easy learning, up to 20 pcs of push buttons.

3. WIRING DIAGRAM

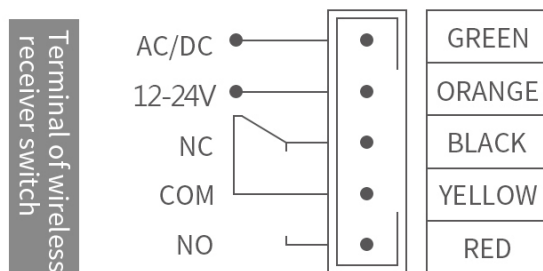

4. TYPE CONVERSION

M **M-type:**
Press the panel once, the receiver relay remains ON for 2s. (The most common type)

L **L-type:**
Press the panel once and the relay remains ON until the next time the panel is pressed.

*Before switching the types, please cut off power supply. Otherwise, the conversion is invalid.

5. OPERATION

- Learning method: Press the learning button, indicator turns green. And then press the Push Button to be learned, indicator flashes twice in green.
- Deleting method: Press the learning button for 5s, the green light flashes twice, all codes are deleted. (cannot delete on by one)

6. TECHNICAL PARAMETER

RECEIVER	
Power supply :	AC/DC 12-24V
Static current :	7mA (DC 12V)
Operating current :	65mA (DC 12V)
Relay contact capacity :	20A 14VDC
Dimension :	62mm(L)*58mm(W)*30mm(H)
PUSH BUTTON	
Power supply :	6V (2 pcs of 3V batteries)
Transmitting frequency :	315/433 MHz
Emission current :	5±1mA
Battery lifespan :	More than 60000 times
Operating distance :	More than 30m
Operating temperature :	-20℃ ~ 50 ℃
Dimension :	194mm(L)*44.2mm(W)*16.8mm(H)