



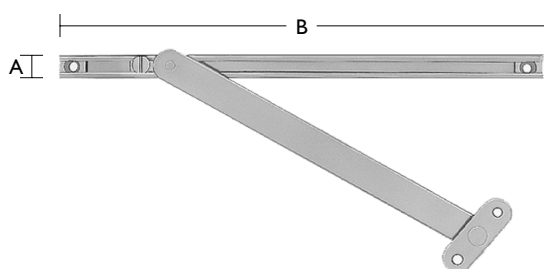

# ADJUSTABLE FRICTION STAY

## IPA NO. 21327





ORDERING NO.					A MM	B MM	MATERIAL MM	SCREW	APPROX. WEIGHT KG / PCS.
IPA NO.	MATERIAL	WITHOUT SPECIFICATION	SURFACE	STANDARD PACKING IN BOXES OF 25 PCS.					
21327	STEEL	0	ELECTROPLATED	1	12	260	17 x 3	4,0	0,14

- CONCEALED FITTING
- OPENS UP TILL 100°
- FRICTION IN ALL POSITIONS
- ADJUSTABLE FRICTION
- ANODIZED ALUMINIUM RAIL



# FITTING INSTRUCTIONS

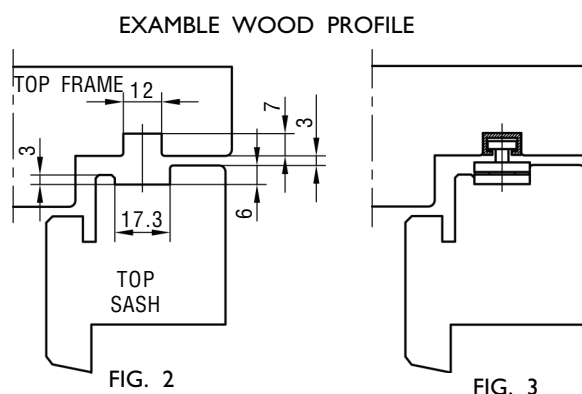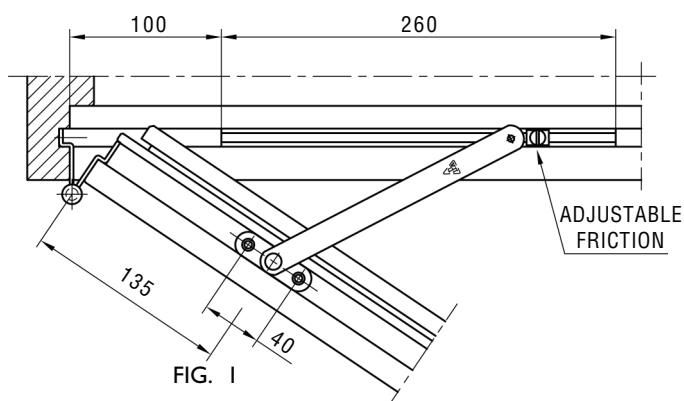

### MAINTENANCE:

THE FITTINGS ARE NOT TO BE PAINTED. TEST THE OPERATION FROM TIME TO TIME. WHEN MOUNTING - LUBRICATE THE PIVOT/MOVABLE METAL PARTS OF THE MECHANISM WHILE ACTIVATING REPEATEDLY. HEREAFTER LUBRICATE MINIMUM TWICE A YEAR. DO NOT LUBRICATE THE ALUMINIUM RAILS. SEE ALSO SECTION H.